




# FireFighter® 400Series

LSZH Single Pair Unshielded IEC60332-1 600V

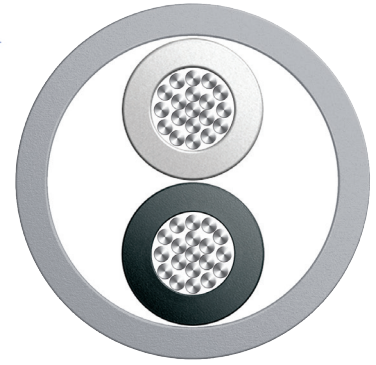

## Application

A range of unshielded single pair cables for indoor use in instrumentation, security, data and audio applications where protection against electrical interference is not required. These cables use FireFighter® Low Smoke Zero Halogen performance materials.

## Cable Design

Conductor	Stranded tinned copper wire
Insulation	LSZH FireFighter®
No. of Pairs	1 (1x2xAWG)
Outer Jacket	LSZH FireFighter® SHF-1

## Characteristics

Colour	Grey
Rated Voltage	600 V
Temperature Range	-20°C up to +90°C
UV Stable	acc. to ISO 4892-2/A

## Fire Behaviour

FireFighter® cables fulfill one or several of the following standards and can be confirmed at time of enquiry:

- Flame Retardant acc. to IEC 60332-1 flame resistance for single cables
- Flame Retardant acc. to IEC 60332-3 flame resistance for bunched cables
- Halogen Free acc. to IEC 60754 series
- Smoke Emission acc. to IEC 61034 series





# FireFighter® 400Series

LSZH Single Pair Unshielded IEC60332-1 600V

## Specification

Part Number	Formation N° x Pair x AWG	Colour Code	Nom. Ø mm	Weight kg/km
4001P2244	1 x 2 x 22 awg	black / red	4,32	18
4001P2044	1 x 2 x 20 awg	black / red	4,57	21
4001P2044-BW	1 x 2 x 20 awg	black / white	4,57	21
4001P1844	1 x 2 x 18 awg	black / red	5,94	39
3001P1844	1 x 2 x 18 awg	black / white	6,00	39
4001P1644	1 x 2 x 16 awg	black / white	6,96	51
4001P1444	1 x 2 x 14 awg	black / white	8,64	96
4001P1244	1 x 2 x 12 awg	black / white	9,80	142

## Electrical Characteristics

Part Number	Nom. Capacitance (cond./cond.) pF/m	Nom. Conductor DC Resistance Ω/km	Nom. Inductance μH/m
4001P2244	98	51,4	0,56
4001P2044	80,8	33	0,56
4001P2044-BW	80,8	33	0,56
4001P1844	83,64	19,22	0,56
3001P1844	83,64	19,22	0,56
4001P1644	66,2	13,6	0,56
4001P1444	70	8,8	0,56
4001P1244	108	5,9	0,56

*Belcom Cables Ltd. ("Belcom") reserves the right to make changes to the product described in this specification without prior notice. Belcom does not assume any liability which may occur due to the use of the specification described herein. Drawings are not to scale unless otherwise specified and are provided for general and informational purposes only. All values represented in this specification should be used as a guide only and exact product details can be confirmed at point of enquiry.*