## **TECHNICAL DATA SHEET**




## INSTRUMENTATION CABLES – MAS SERIES OVERALL SCREEN

## MAS5502CS/600V - 2 Pair 1.5 mm<sup>2</sup> TCW CS 600V

**APPLICATION:** Instrumentation Cable suitable Industrial Applications.

Suitable for running in conjunction with 0.6/1kv rated cables.

Standards	AS/NZS1125 , AS/NZS3808 ,				
	IEC 60332-1-2 , IEC 60332-3-22 ,				
	IEC 60079.14 , <i>RoHS</i> Compliant				
Conductor	Stranded Tinned Copper Conductor				
	1.5mm (7/0.50mm)				
Insulation	0.8mm PVC ,V90HT ,				
	White/Black Numbered Pair's				
Screen	Overall Shield of Ali/Polyester Foil c/w				
	Tinned Copper Drain Wire (7/0.20mm)				
Armour	Not Applicable				
Sheath	SPVC , 5V-90 , Flame Retardant ,				
	UV Resistant Black PVC				
Operating Temp.	-20°C to +90°C				
Rated Voltage	110VRMS/150VDC				
Insulation Voltage Rating	600V				
Max. Current Rating	13 Amp				
Max. DC Resistance @ 20°C	13.6 Ω/km				
Max. Capacitance Cond. To	200 pF/m				
Cond. (Screened)					
Max. Capacitance Cond. To	300 pF/m				
Scr. (Screened)					
Inductance @ 1kHz	0.95 mH/km				
L/R Ratio @ 1kHz	36.5 μΗ/Ω				
Insulation Resistance	140 MΩ/km				
Bending Radius (Fixed)	10D (D = Cable Diameter)				
·					

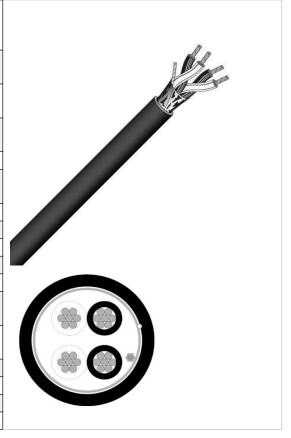

Product	Pairs	Conductor	Insulation Thickness	Outer Sheath Thickness	Approx. Cable O.D	Approx. Cable Weight
Product	Number of	Conductor	THICKHESS	THICKHESS	Cable O.D	weight
<b>Maser Ordering Code</b>	Pairs	mm²	mm	mm	mm	Kg/km
MAS5502CS/600V	2 Pair	1.5mm	0.8	1.8	14.3	200

## **Jacket Marking**

MASER MASS502CS/600V INSTRUMENTATION CABLE 2PR 1.5mm² TCW/PVC/CS/PVC V90 UV 600V ROHS (MANUFACTURE DATE) (METRE MARK)

Recommended Gland = MM-A1A2-25L

Disclaimer: Although Maser Communications NZ Limited makes every reasonable effort to ensure their accuracy at the time of this publication, information and specifications described herein are subject to error or omission and to change without notice. Maser provides the information and specifications herein on an "AS IS" basis, with no representations or warranties, whether express, statutory or implied. In no event will Maser be liable for any damages (including consequential, indirect, incidental, special, punitive, or exemplary damages) whatsoever, even if Maser has been advised of the possibility of such damages, whether in an action under contract, negligence or any other theory, arising out of or in connection with the use, or inability to use, the information or specifications described herein.

