


INSTRUMENTATION CABLES – MAS SERIES

INDIVIDUAL & OVERALL SCREEN

MAS5504ESCS600V - 4 Pair 1.5 mm² TCW/PVC/ESCS/PVC 0.6/1kV

APPLICATION: Instrumentation Cable suitable Industrial Applications.
Suitable for running in conjunction with low voltage mains.

Standards	AS/NZS1125 , AS/NZS3808 , IEC 60332-1-2 , IEC 60332-3-22 , IEC 60079.14 , RoHS Compliant
Conductor	Stranded Tinned Copper Conductor 1.5mm (7/0.50mm)
Insulation	0.8mm PVC ,V90HT , White/Black Numbered Pair's
Screen	Individual & Overall Shield of Alu/Polyester Foil c/w Tinned Copper Drain Wire (7/0.20mm)
Armour	Not Applicable
Sheath	SPVC , 5V-90 , Flame Retardant , UV Resistant Black PVC
Operating Temp.	-20°C to +90°C
Rated Voltage	110VRMS/150VDC
Insulation Voltage Rating	0.6/1kV
Max. Current Rating	13 Amp
Max. DC Resistance @ 20°C	13.6 Ω/km
Max. Capacitance Cond. To Cond. (Screened)	200 pF/m
Max. Capacitance Cond. To Scr. (Screened)	300 pF/m
Inductance @ 1kHz	0.95 mH/km
L/R Ratio @ 1kHz	36.5 μH/Ω
Insulation Resistance	140 MΩ/km
Bending Radius (Fixed)	10D (D = Cable Diameter)

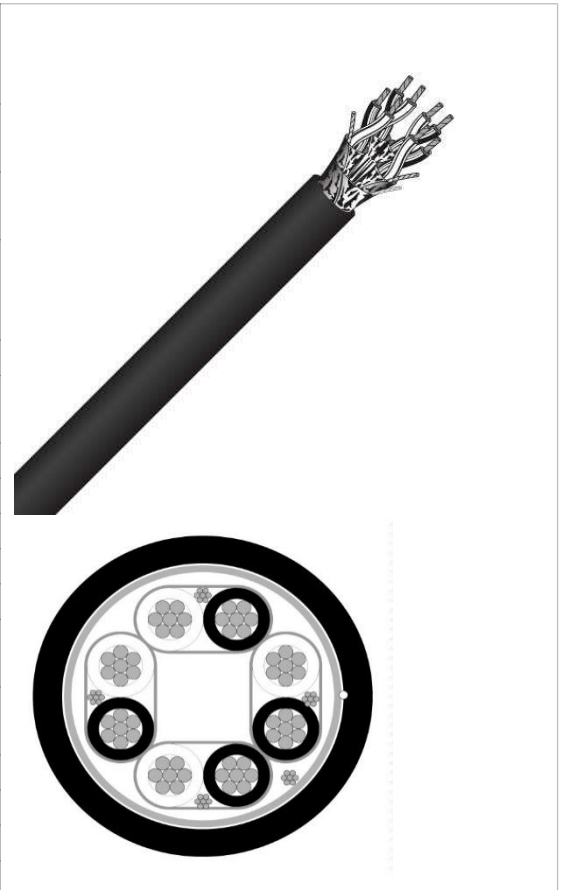

Product	Pairs	Conductor	Insulation Thickness	Outer Sheath Thickness	Approx. Cable O.D	Approx. Cable Weight
Maser Ordering Code	Number of Pairs	mm²	mm	mm	mm	Kg/km
MAS5504ESCS600V	4 Pair	1.5mm	0.8	1.8	17.6	370

Jacket Marking

MASER MAS5504ESCS600V INSTRUMENTATION CABLE 4PR 1.5mm² TCW/PVC/ESCS/PVC V90 UV 0.6/1kV RoHS (MANUFACTURE DATE) (METRE MARK)

Recommended Gland = MM-A1A2-25L

Disclaimer: Although Maser Communications NZ Limited makes every reasonable effort to ensure their accuracy at the time of this publication, information and specifications described herein are subject to error or omission and to change without notice. Maser provides the information and specifications herein on an "AS IS" basis, with no representations or warranties, whether express, statutory or implied. In no event will Maser be liable for any damages (including consequential, indirect, incidental, special, punitive, or exemplary damages) whatsoever, even if Maser has been advised of the possibility of such damages, whether in an action under contract, negligence or any other theory, arising out of or in connection with the use, or inability to use, the information or specifications described herein.