


## INSTRUMENTATION CABLES – MAS SERIES

### INDIVIDUAL & OVERALL SCREEN - STEEL WIRE ARMoured

### MAS5524ESCSSWA – 24 Pair 1.5mm<sup>2</sup> TCW ESCS SWA

**APPLICATION:** Instrumentation Cable suitable for areas requiring mechanical protection.  
Suitable for Direct Burial.

<b>Standards</b>	AS/NZS1125 , AS/NZS3808 , IEC 60332-1-2 , IEC 60332-3-22 , IEC 60079.14 , <b>RoHS</b> Compliant
<b>Conductor</b>	Stranded Tinned Copper Conductor 1.5mm (7/0.50mm)
<b>Insulation</b>	0.4mm PVC ,V90HT , White/Black Numbered Pair's
<b>Screen</b>	Individual & Overall Shield of Alu/Polyester Foil c/w Tinned Copper Drain Wire (7/0.20mm)
<b>Armour</b>	Galvanised Steel Wire (SWA)
<b>Sheath</b>	SPVC , 5V-90 , Flame Retardant , UV Resistant Black PVC
<b>Operating Temp.</b>	-20°C to +90°C
<b>Rated Voltage</b>	110VRMS/150VDC
<b>Insulation Voltage Rating</b>	300V
<b>Max. Current Rating</b>	13 Amp
<b>Max. DC Resistance @ 20°C</b>	13.6 Ω/km
<b>Max. Capacitance Cond. To Cond. (Screened)</b>	200 pF/m
<b>Max. Capacitance Cond. To Scr. (Screened)</b>	300 pF/m
<b>Inductance @ 1kHz</b>	0.95 mH/km
<b>L/R Ratio @ 1kHz</b>	36.5 μH/Ω
<b>Insulation Resistance</b>	140 MΩ/km
<b>Bending Radius (Fixed)</b>	10D (D = Cable Diameter)

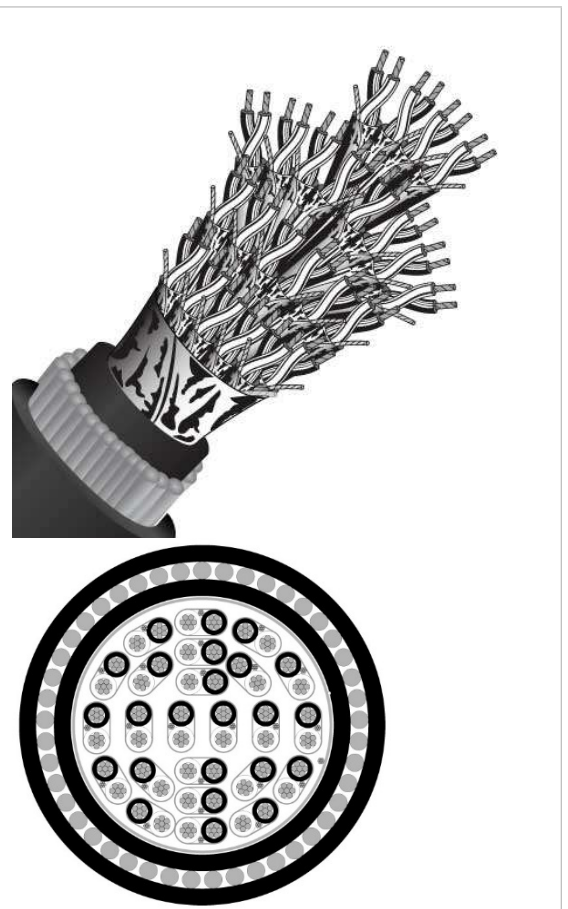

Product	Pairs	Conductor	O.D over Bedding	GSWA Size	O.D over GSWA	Outer Sheath Thickness	Nominal Cable O.D	Cable Weight
Maser Ordering Code	Number of Pairs	mm <sup>2</sup>	mm	mm	mm	mm	mm	Kg/km
MAS5524ESCSSWA	24 Pair	1.5mm	27.1	1.6	30.3	2.2	34.7	2378

#### Jacket Marking

MASER MAS5524ESCSSWA INSTRUMENTATION CABLE 24PR 1.5mm<sup>2</sup> TCW/PVC/ESCS/PVC/SWA/PVC V90 UV RoHS (MANUFACTURE DATE) (METRE)

**Recommended Gland = MM-E1W-40S**

**Disclaimer:** Although Maser Communications NZ Limited makes every reasonable effort to ensure their accuracy at the time of this publication, information and specifications described herein are subject to error or omission and to change without notice. Maser provides the information and specifications herein on an "AS IS" basis, with no representations or warranties, whether express, statutory or implied. In no event will Maser be liable for any damages (including consequential, indirect, incidental, special, punitive, or exemplary damages) whatsoever, even if Maser has been advised of the possibility of such damages, whether in an action under contract, negligence or any other theory, arising out of or in connection with the use, or inability to use, the information or specifications described herein.