

E1W Type Armoured Glands Double Compression

For indoor and outdoor glanding of SWA circular cables.

Nickel Plated Brass / Metric Thread / Locknut / IP66 / Displacement Seal

Temperature: Standard seal (Nitrile) -20°C to +80°C. On request (Silicone) -60°C to +180°C


Accessories: PVC/LSF Shrouds , Earth Tags , Locknuts

Also available on request in Stainless Steel (304 or 316L) & Aluminium (6082)

Standards: EN 62444:2013 Cert No: ET/LVD/2018/1157



Maser Gland Code	Gland Size Metric	Metric Thread "C"	Thread Length (mm) "E"	Cable Range "A"		Cable Range "B"	
				Minimum (mm)	Maximum (mm)	Minimum (mm)	Maximum (mm)
MM-E1W-20SS	20S16	M20	15	5.0	8.6	8.0	13.2
MM-E1W-20S	20S	M20	15	8.8	11.1	11.8	16.0
MM-E1W-20L	20L	M20	15	11.4	14.0	14.0	20.8
MM-E1W-25S	25S	M25	15	13.0	16.0	18.0	24.0
MM-E1W-25L	25L	M25	15	17.3	20.0	20.3	27.4
MM-E1W-32S	32S	M32	15	20.0	23.0	24.5	31.0
MM-E1W-32L	32L	M32	15	24.2	26.3	26.5	33.5
MM-E1W-40L	40L	M40	15	26.0	29.0	30.4	36.0
MM-E1W-40S	40S	M40	15	29.5	32.1	33.2	40.0
MM-E1W-50S	50S	M50	15	33.0	38.1	40.0	46.5
MM-E1W-50L	50L	M50	15	38.0	44.0	44.0	52.6
MM-E1W-63S	63S	M63	20	44.0	50.5	50.0	59.0
MM-E1W-63L	63L	M63	20	50.0	56.0	56.0	66.0
MM-E1W-75S	75S	M75	20	56.0	62.0	63.5	71.0
MM-E1W-75L	75L	M75	20	62.0	68.5	69.0	78.0
MM-E1W-90L	90L	M90	20	65.0	80.0	84.0	96.0

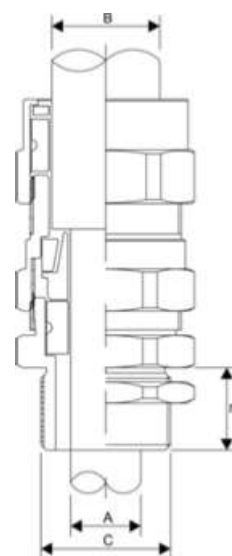

Disclaimer: Although Maser Communications NZ Limited makes every reasonable effort to ensure their accuracy at the time of this publication, information and specifications described herein are subject to error or omission and to change without notice. Maser provides the information and specifications herein on an "AS IS" basis, with no representations or warranties, whether express, statutory or implied. In no event will Maser be liable for any damages (including consequential, indirect, incidental, special, punitive, or exemplary damages) whatsoever, even if Maser has been advised of the possibility of such damages, whether in an action under contract, negligence or any other theory, arising out of or in connection with the use, or inability to use, the information or specifications described herein.