

2 Core 0.75mm Fire Alarm Cable

2 Core, Stranded Tinned Oxygen Free Copper Wire (AS1125), V90 PVC Insulation Rated to 450/750V, V90 PVC Jacket (AS/NZS 3808), AS/NZS 5000.2:2006



Cores	Nominal Area (mm ²)	Colour	Length	Maser Code
2 Core	0.75 (24/0.2)	Grey	200m Box	B2C0.75FACTCWGY200BX
		Red	200m Box	B2C0.75FACTCWDR200BX

2 Core 0.75mm Foil Screened Fire Alarm Cable

2 Core, Stranded Tinned Oxygen Free Copper Wire (AS1125), V90 PVC Insulation Rated to 450/750V, V90 PVC Jacket (AS/NZS 3808), Foil Screen (with Drain wire) AS/NZS 5000.2:2006, 200m Reel



Cores	Nominal Area (mm ²)	Colour	Length	Maser Code
2 Core	0.75 (24/0.2)	Grey	200m Reel	B2C0.75SCRFCAGY200
		Red	200m Reel	B2C0.75SCRFCARD200

2 Core 1.25mm Fire Alarm Cable


2 Core, Stranded Tinned Oxygen Free Copper Wire (AS1125), V90 PVC Insulation Rated to 450/750V, V90 PVC Jacket (AS/NZS 3808), AS/NZS 5000.2:2006



Cores	Nominal Area (mm ²)	Colour	Length	Maser Code
2 Core	1.25 (16/0.32)	Grey	200m Box	B2C1.25FACTCWGY200BX
		Red	200m Box	B2C1.25FACTCWDR200BX

2 Core 1.25mm Foil Screened Fire Alarm Cable

2 Core, Stranded Tinned Oxygen Free Copper Wire (AS1125), V90 PVC Insulation Rated to 450/750V, V90 PVC Jacket (AS/NZS 3808), Foil Screen (with Drain wire) AS/NZS 5000.2:2006, 200m Reel

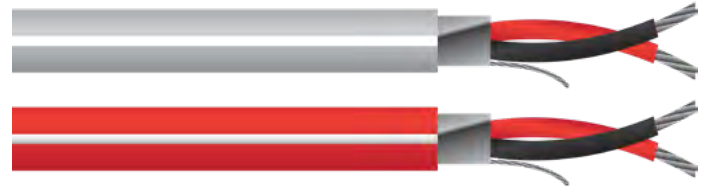

Cores	Nominal Area (mm ²)	Colour	Length	Maser Code
2 Core	1.25 (16/0.32)	Grey	200m Reel	B2C1.25SCRFCAGY200
		Red	200m Reel	B2C1.25SCRFCARD200

2 Core 2.0mm Fire Alarm Cable

2 Core, Stranded Tinned Oxygen Free Copper Wire (AS1125), V90 PVC Insulation Rated to 450/750V, V90 PVC Jacket (AS/NZS 3808), AS/NZS 5000.2:2006



Cores	Nominal Area (mm ²)	Colour	Length	Maser Code
2 Core	2.0 (26/0.32)	Grey	200m Box	B2C2.0FACTCWGY200BX
		Red	200m Box	B2C2.0FACTCWDR200BX

Looking for something else?

Check out our website for more cable options or give our sales team a call...

0800 663 7825 | www.maser.co.nz