

## INSTRUMENTATION CABLES – MAS SERIES


### INDIVIDUAL & OVERALL SCREEN - STEEL WIRE ARMoured

### INTRINSICALLY SAFE

### MAS5004ESCSSWA BLUE – 4 Pair 0.5mm<sup>2</sup> TCW ESCS SWA

**APPLICATION:** Instrumentation Cable suitable for intrinsically safe applications requiring mechanical protection.  
Suitable for Direct Burial.

<b>Standards</b>	AS/NZS1125 , AS/NZS3808 , IEC 60332-1-2 , IEC 60332-3-22 , IEC 60079.14 , <b>RoHS</b> Compliant
<b>Conductor</b>	Stranded Tinned Copper Conductor 0.5mm (7/0.30mm)
<b>Insulation</b>	0.4mm PVC ,V90HT , White/Black Numbered Pair's
<b>Screen</b>	Individual & Overall Shield of Al/Polyester Foil c/w Tinned Copper Drain Wire (7/0.20mm)
<b>Armour</b>	Galvanized Steel Wire
<b>Sheath</b>	SPVC , 5V-90 , Flame Retardant , UV Resistant Blue PVC Intrinsically Safe
<b>Operating Temp.</b>	-20°C to +90°C
<b>Max. Rated Voltage</b>	110VRMS/150VDC
<b>Insulation Voltage Rating</b>	300V
<b>Max. Current Rating</b>	3.2 Amp
<b>Max. DC Resistance @ 20°C</b>	38.4 Ω/km
<b>Max. Capacitance Cond. To Cond. (Screened)</b>	145 pF/m
<b>Max. Capacitance Cond. To Scr. (Screened)</b>	240 pF/m
<b>Inductance @ 1kHz</b>	1.00 mH/km
<b>L/R Ratio @ 1kHz</b>	13.7 μH/Ω
<b>Insulation Resistance</b>	140 MΩ/km
<b>Bending Radius (Fixed)</b>	10D (D = Cable Diameter)

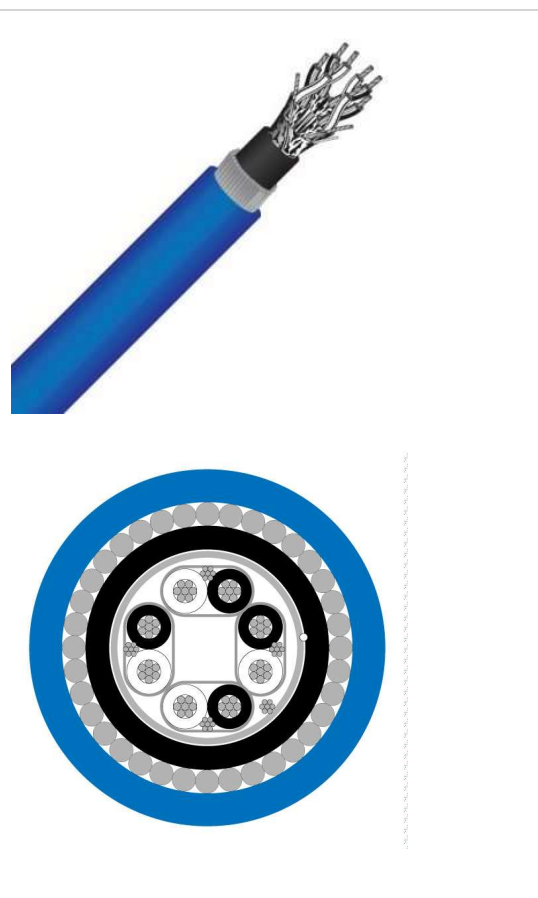

Product	Pairs	Conductor	O.D over Bedding	GSWA Size	O.D over Armour	Outer Sheath Thickness	Nominal Cable O.D	Cable Weight
<b>Maser Ordering Code</b>	<b>Number of Pairs</b>	<b>mm<sup>2</sup></b>	<b>mm</b>	<b>mm</b>	<b>mm</b>	<b>mm</b>	<b>mm</b>	<b>Kg/km</b>
MAS5004ESCSSWA BLUE	4 Pair	0.5mm	10.0	0.8	11.6	1.5	14.6	394

#### Jacket Marking

MASER MAS5004ESCSSWA INSTRUMENTATION CABLE 4PR 0.5mm<sup>2</sup> TCW/PVC/ESCS/PVC/SWA/PVC V-90 UV RoHS (MANUFACTURE DATE) (METRE MARK)

**Recommended Gland = Please contact Maser**

**Disclaimer:** Although Maser Communications NZ Limited makes every reasonable effort to ensure their accuracy at the time of this publication, information and specifications described herein are subject to error or omission and to change without notice. Maser provides the information and specifications herein on an "AS IS" basis, with no representations or warranties, whether express, statutory or implied. In no event will Maser be liable for any damages (including consequential, indirect, incidental, special, punitive, or exemplary damages) whatsoever, even if Maser has been advised of the possibility of such damages, whether in an action under contract, negligence or any other theory, arising out of or in connection with the use, or inability to use, the information or specifications described herein.